

18.5" P-cap Touch Monitor



Model **H1912PWH-UH**

Touch Technology **P-cap**

Version **V 1.0**





Open-frame Touch Monitor

Horsent designs H1912PWH-UH open-frame multi-touch monitor for high traffic vertical applications, such as finance, gaming, industry, self-service terminal, etc.

The H1912PWH-UH applies high performance PCAP touch technology, offers excellent 10-point touch and tablet-like user experience.

The durable, light weighted, display module delivers image with high resolution and clarity, yet still low power consumption.

The H1912PWH-UH features a special designed mounted-molded front bezel, enables perfect matched mounting to your kiosk with great dust&water resistance.



Features

- 10-point touch
- Slim bezel
- Firm sealing
- Accurate touch
- Compact design
- Easy to install
- Flush mounted




Applications


- ATM
- Tickets machine
- Vending machine
- Information terminal
- Gaming machine

Product Name		18.5 inch LCD Touch Monitor	
Product Model		H1912PWH-UH	
LCD panel Technical Parameter	Size	18.5 inch	
	Aspect Ratio	16 : 9	
	Backlight Type	LED Backlight	
	Pixel Pitch	0.3mm x 0.3mm	
	Active Area	409.8mm x 230.4mm	
	Best Resolution	1920 × 1080 @ 60 Hz	
	Response Time	5 ms	
	Color	16.7 million	
	Brightness	LCD Panel: 250 cd/m ²	
	Contrast Ratio	1000:1 (standard Values)	
	Viewing Angle (CR > 10)	Horizontal: 170° (85°/85°) Vertical: 160° (80°/80°)	
	Video Input Format	RGB Analog Signal/ Digital Signal	
	Video Input Interface	VGA / HDMI	
	Input Frequency	Horizontal: 30~82 Hz Vertical: 50~75 Hz	
Power Consumption	≤10W		
Touch Screen Technical Parameter	Touch Screen Type	Capacitive Touch Screen	
	Cover Glass	2.4mm	
	Transparency	87%	
	Hardness	7H	
	Interface	USB2.0	
	Touch Point	10	
	Response Time	≤10 ms	
	Touch Method	Finger / Capacitive Pen	
	Touch Lifespan	≥50,000,000	
	Linearity	< 2%	
Single-point OS	Windows XP , Linux		
Multi-point OS	Windows7/8/10 , Android		
Touch Monitor Technical Parameter	Boundary Dimension	455.5mm × 280.6mm × 41.0mm	
	OSD Panel	Optional Accessory : Power switch、Menu、Up、Auto、Down	
	Power Supply	Input : DC 12V±5%	
	Power Consumption	Max : 15w; Sleep : 3w; Off : 2w	
	Installation	Side Mounting Bracket , VESA 75mm&100mm	
	Accessory (Optional)	Signal Line	VGA , HDMI , 1.5m/1.8m , male to male
		USB Wire	A male to B male , 1.8m
		Adaptor	WT1203000 , 12V/3.0A , 115mmx47mmx31mm , Length 1.0m , ϕ 2.5 ,
		Power Line	CCC Power Line, 1.5m , Black
	Temperature	Operating: 0°C-40°C ; Storage: -20°C-60°C	
	Humidity	Operating: 20%-80%; Storage: 10%-90%	
Operation Altitude	< 3000m		
Warranty	3 Years(touch screen and LCD panel 1 year)		

 Product drawing

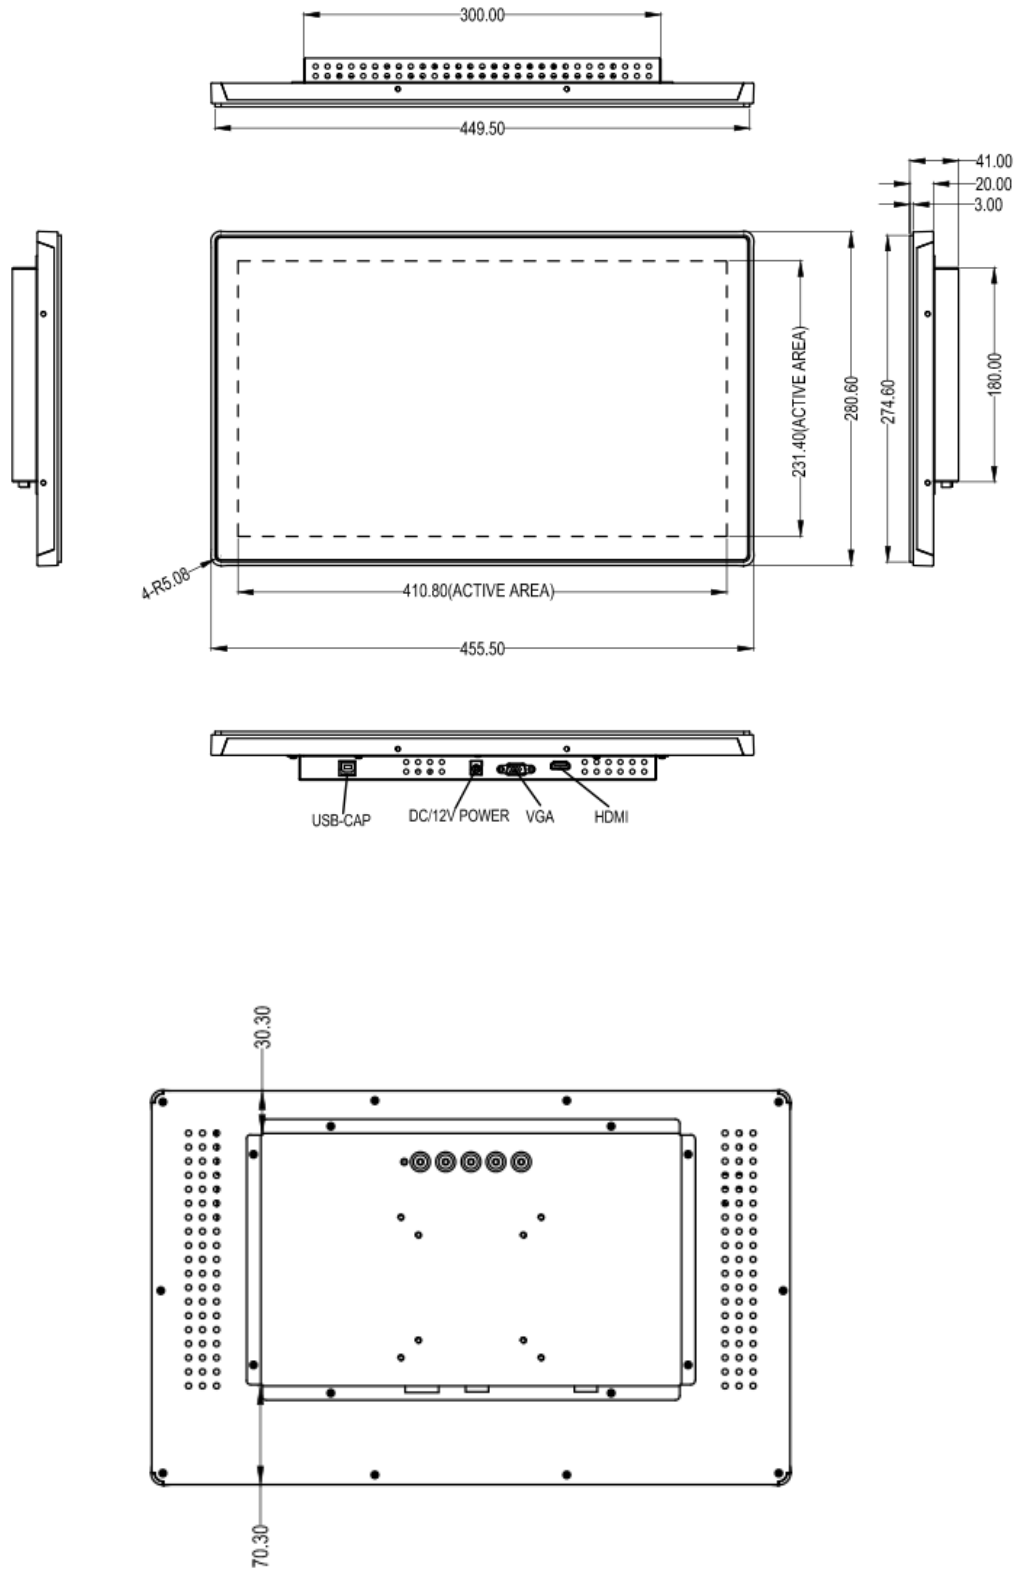

 Product drawing

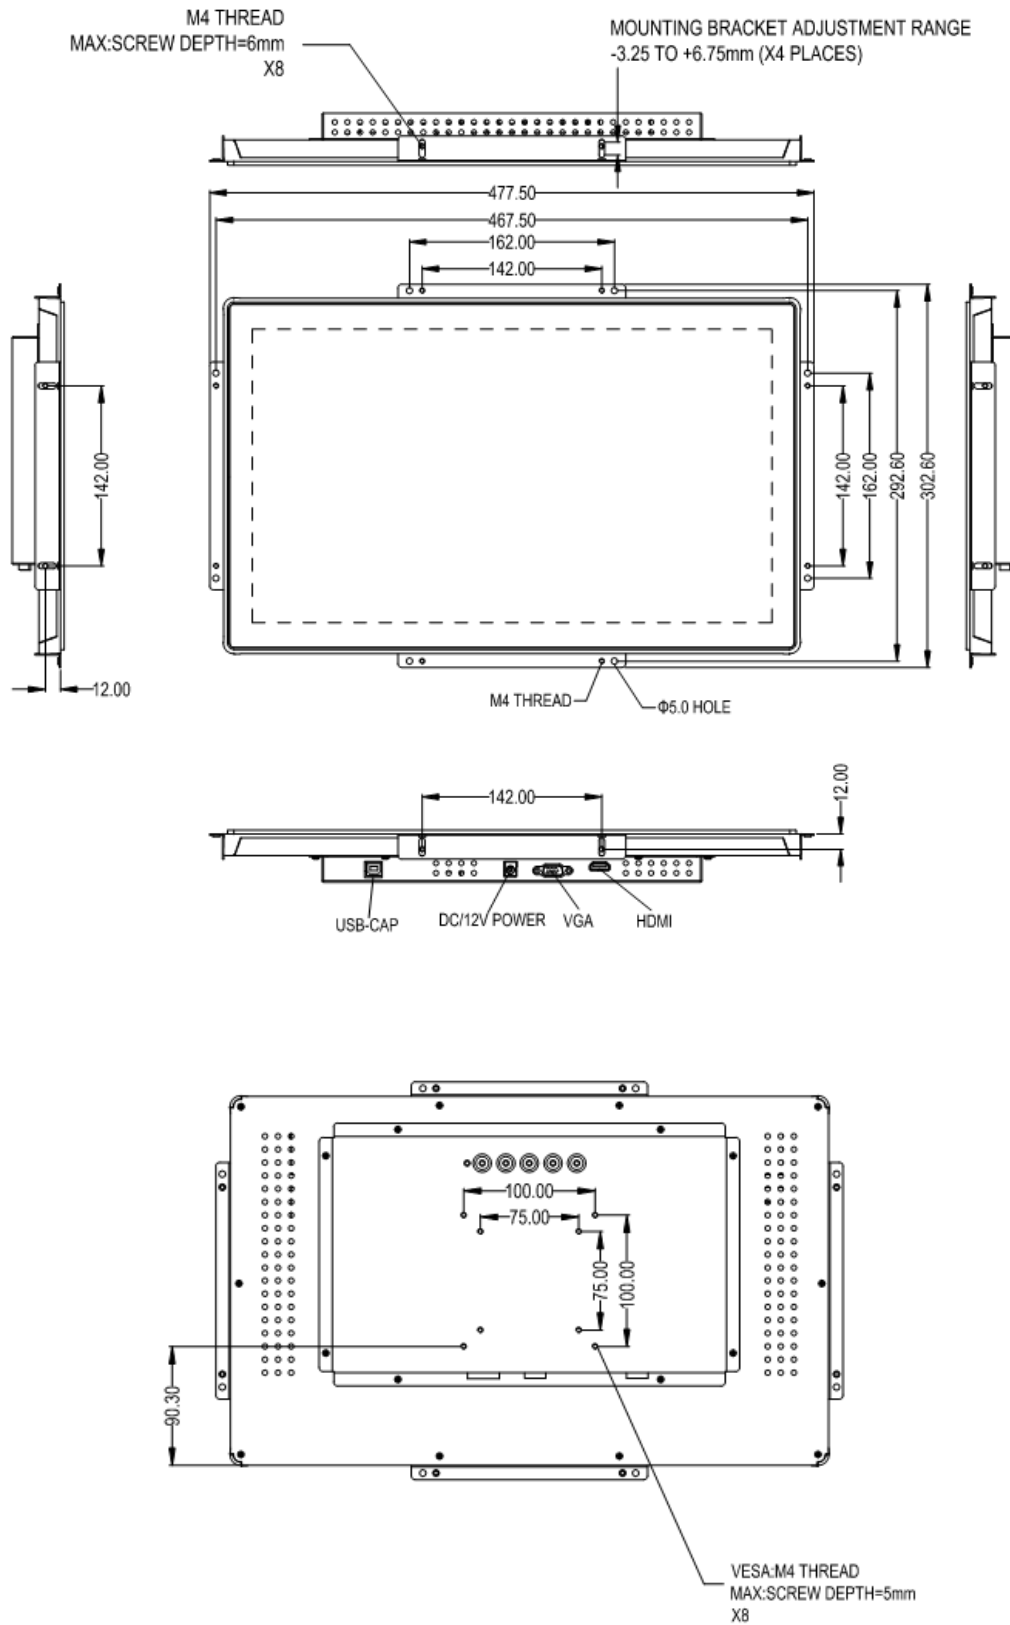



18.5" P-cap
chnology Co., Ltd
Touch Monitor

